System4 Series Video Management System

www.boschsecurity.com

BOSCH
Invented for life

- True Triplex operation
- Simultaneous playback and live view multiscreen display
- Playback six (6) recording formats
- Timed events feature
- Log events feature

System4 Video Management Systems incorporate advanced circuitry and expanded memory with improved color sampling and processing to produce high quality, true-to-life color video images. Enhanced circuitries allow increased image accuracy and faster display rates without annoying onscreen flickering (aliasing) common with multiscreen displays. These units can be used as matrix switchers, displaying any camera to either monitor A or B and include custom alarm display on monitor A with up to 4 pre-position call-ups in a single alarm contact. Also, with the internal universal power supply, the System4 intelligently detects the video input signal input voltage and automatically sets the unit for PAL/NTSC or EIA/CCIR.

Functions

The advanced features of System4 are accessible through the optional IntuiKey remote keyboard. The IntuiKey keyboard is capable of controlling Bosch AutoDome systems and receiver/drivers for pan/tilt/zoom control. The System4 remote keyboards control all primary functions of any selected Bosch VCR. Up to 30 System4 units and 30 VCRs can be programmed and controlled by one keyboard. With Master Clock Synchronization, the System4 automatically synchronizes all of the clocks. With a keyboard port expander unit (see OPTIONS), up to four keyboards can be used to program and control a System4 video controller.

The LTC 2682/90 16-channel Triplex multiplexer allows for the following:

- Simultaneous recording and multiscreen viewing on both monitors.
- Simultaneous recording and playback and live viewing multiscreen.
- Can play back the recording formats of 6 different manufacturers.

The system's user-friendly controls allow fast and easy programming and operation. System4 units include an onscreen menu for programming which is available in English, French, German, Spanish, Dutch, or Italian. Programming allows for either AutoSet or customized system configuration via the Advanced Setup program. Help screens provide explanation and instruction, guiding operators step-by-step through the setup process. When the AutoSet feature is enabled, System4 will automatically configure itself for recording, sequencing, and video loss listing based on the number of connected cameras.

All System4 models provide digital motion detection, ensuring that cameras with motion present become the priority for recording. Recording may be programmed as either "exclusive" or “interleave", based on motion or alarm detection. Four levels of

sensitivity are available including direction sensing, target size, and a special walk-through setup to eliminate false alarms. A selectable audible buzzer is available in this mode. Parameter setup can be preprogrammed using the Timed Events feature, which allows several configurations for system operation and recording. Up to six separate System4 operational parameters may be programmed and stored in the system memory for manual call-up or time activation. System4 units include front panel controls, synchronization with VCR head switching, freeze, 4X zoom, video loss indicators, alarm capture, password security, multi-relay outputs, and full function time/date with 16-character titling record capability. All units are compatible with standard VHS and SVHS formats and normal and high density VCRs. No external synchronization of camera inputs is required, as integrated time based correction is included in all models.

A Log Events feature tracks event history and a console port allows PC control of the system, full duplex VCR control including remote VCR setup and a time/date/search function to reduce tape viewing time, or interaction with Access Control Systems and Bosch LTC 2650/00 Graphical User Interface (GUI) software packages.

Today's growing business demands security that is sophisticated, reliable and easy to use. From discount stores to commercial offices, System4 intelligently provides a multifunction system capable of handling up to 9 or 16 camera inputs with switching and multiplexer control, pan/tilt/zoom, and VCR control in one compact unit.

Certifications and approvals

Electromagnetic Compatibility (EMC)	CE Immunity, CE Emission Class A, FCC Class A
Safety	CE, UL, cUL

Installation/configuration notes

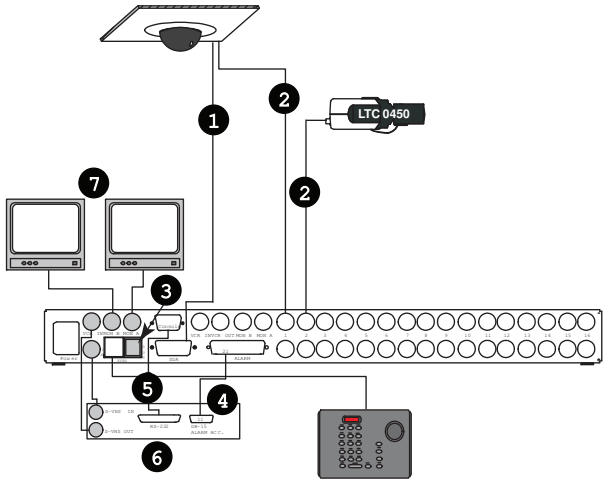

System4 Triplex, Typical Operation

1 Data

2 Video

3 Terminated Resistor

4 VEXT Connection 21 to 11 and 25 to 15 (GND)

5 S1383

6 S-VHS Type VCR

7 S-VHS Video

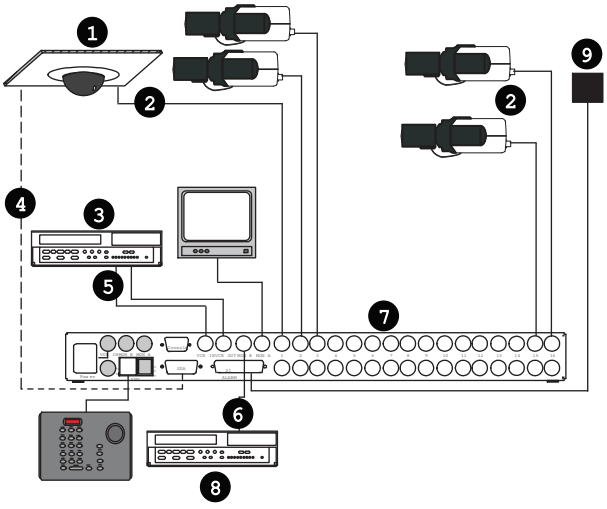

System4, Typical Configuration

1 AutoDome

2 Video

3 Record/Playback VCR

4 Data

5 Out

6 In

7 Up to 16 Cameras

8 Recording VCR

9 PIR Sensor

Simultaneous Recording to Two VCR's (Triplex Operation)

The LTC 2682 provides two independent VCR outputs; each output can be programmed to encode camera sequences. Using the LTC 2682 in this mode offers the flexibility to distribute the number of cameras between two VCRs to provide a fast update rate for each camera. Two VCRs may also be programmed so that one VCR may be used for normal encoding while the other is used for action/alarm encoding. In this triplex mode of operating, Monitor A always displays the image in multi-screen, quad, full, or multiple cameras in a sequence mode.

Technical specifications

Electrical

Description	Voltage Range	Power/ Current
16-channel Triplex	108 to 253 VAC, 50/60 Hz	30 W/0.5 A

Synchronization

Full Time-based Correction

Monochrome	625 line, 50 Hz, CCIR
Monochrome	525 line, 60 Hz, EIA RS-170
Color	625 line, 50 Hz, PAL
Color	525 line, 60 Hz, NTSC

Digital Memory

720 H x 576 V

AGC: Automatic or manual adjustment for each video input. Video Input Level: 0.5 Vp-p to 2.0 Vp-p composite video signal.

Operating Modes

Simultaneous record and multi-screen viewing on both monitors. Simultaneous record and playback and multi-screen viewing.

Display Modes

Live

Monitor A	Full, quad, or multi-screen display
Monitor B	Full (alarm or action call-up only), quad, or multi-screen display

Playback

Monitor A	Full, quad, or multi-screen display
Monitor B	Full

Controls and Indicators - Front panel

Inputs

Camera	9 (16) inputs; 18 (32) BNC connectors, automatic looping termination BNC
VCR IN	One (1) BNC
VCR IN	One (1) Y/C

Outputs

Monitor A	One (1) BNC
Monitor B	One (1) BNC
VCR OUT	One (1) BNC
Monitor A	One (1) Y/C
Monitor B	One (1) Y/C
VCR OUT	One (1) Y/C

Connectors

Power	IEC socket, 3-wire power cord with grounded plug; 1.8 m (6 ft)
Accessory Inputs/ Outputs	One (1), 25-pin D-type connector for alarms and accessories
Alarm Inputs	9 (16) individually selectable NO or NC alarm

Inputs

Relay Output	Three (3) relay outputs (selectable NO or NC), one (1) for action/alarm (VCR # 1), one (1) for action/alarm (VCR # 2) and one (1) for video loss (these relay contacts handle up to 1 A at 40 VAC/VDC)
SDA	15-pin D type for 5 Bi-Phase outputs
Console	9-pin D type for RS-232 controls
VEXT inputs	Two (2)

Mechanical

Construction	Steel chassis with sheet metal cover and plastic bezel
Finish	Charcoal case
Dimensions (W x H x D)	440 x 305 x 40 mm (17.3 x 12 x 1.7 in.)
Weight	5 kg (11 lb)
Rack Mount Kit (Included)	For mounting one unit in an EIA 48 cm (19 in.) rack

Environmental

Operating Temperature	10°C to 55°C (50°F to 131°F)
Storage Temperature	–20°C to 60°C (–4°F to 140°F)
Humidity	0% to 90% relative, non-condensing

Ordering information

LTC 2672/90 Video Management System
9 channel multiplexer, color and B&W, triplex, 105–253 VAC, 50/60 Hz
Order number **LTC 2672/90**

LTC 2682/90 Video Management System
16 channel multiplexer, color and B&W, triplex, 105–253 VAC, 50/60 Hz
Order number **LTC 2682/90**

Accessories

KBD-Universal Keyboard
IntuiKey Universal Keyboard for use with Allegiant, Divar, System4 Multiplexers, Bosch VMS, and VIDOS
Order number **KBD-UNIVERSAL**

KBD-Digital Keyboard
IntuiKey Digital Keyboard for use with Divar Digital Video Recorders, System4 Multiplexers, Bosch VMS, and VIDOS
Order number **KBD-DIGITAL**

LTC 2601/00 Keyboard
for 6plex and System4 with push button PTZ control
Order number **LTC 2601/00**

LTC 2604/50 Keyboard Port Expander Unit
System4, 230 V, 50 Hz
Order number **LTC 2604/50**

LTC 2604/60 Keyboard Port Expander Unit
System4, 120 V, 60 Hz
Order number **LTC 2604/60**

LTC 2609/00 System4 Extension Kit
links up to six (6) System4 Multiplexers, 90 units
Order number **LTC 2609/00**

LTC 2650/00 Graphical User Interface (GUI)
Graphical User Interface for programming and controlling
Order number **LTC 2650/00**

LTC 2605/91 System4 Video Manager
for use with Divar and System 4 Multiplexers, 105–253 VAC, 50/60 Hz
Order number **LTC 2605/91**

S1386 VCR Control Cable
for Philips LTC multiplexers and VCRs
Order number **S1386**

S1383 VCR Control Cable
VCR control cable for mux to VCR
Order number **S1383**

LTC 8558/00 Keyboard Cable
optional, 30.5 m (100 feet)
Order number **LTC 8558/00**

Represented by:

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:
Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:
Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com

© Bosch Security Systems 2013 | Data subject to change without notice
2348094219 | en, V1, 04. Oct 2013